


Ceiling & floor

Multi Series



AUX
AIR CONDITIONER

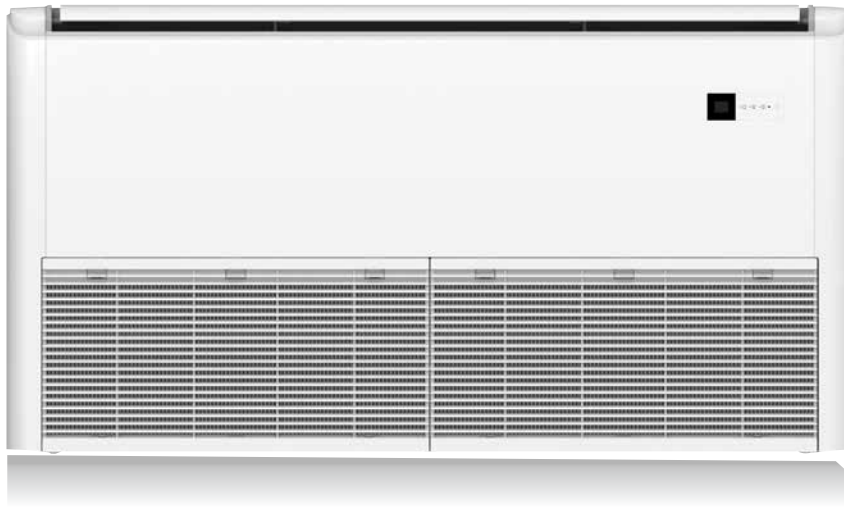

Ceiling & floor















- 

R32
- A++**
COOLING
- A+**
HEATING
- DC**
INVERTER
- 5** YEARS
WARRANTY


The universal, timeless and compact design of AUX ceiling & floor units, makes them applicable in a wide variety of interior spaces, from commercial shops, restaurants and offices, or even suitable for your family home.




Features

 4D Air Flow	 Washable Filter	 Hydrophilic aluminum fin	 Long-term Filter	 0.5W Standby	 Remote Control	 Low Ambient Cooling	 Intelligent Defrosting	 Auto Restart Function	 Self-diagnosis Function	 WiFi Control	 Fast Cooling/Heating
 Wired Control	 Central Control	■ standard ■ optional									



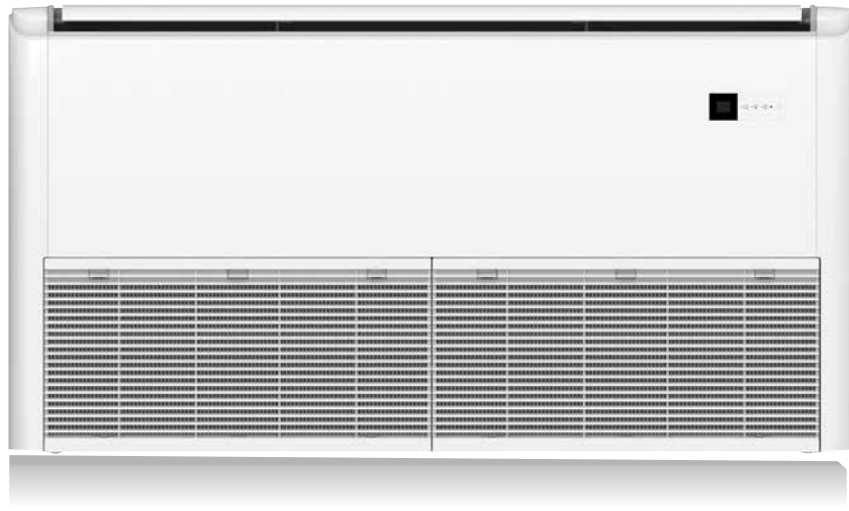


Ceiling & floor

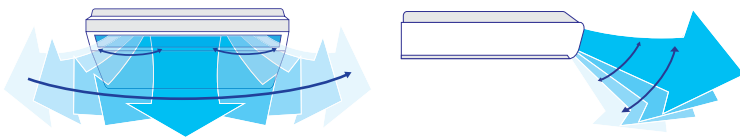

■ 3D Air Swing

Vertical and horizontal swing makes air flow to every corner of the room.

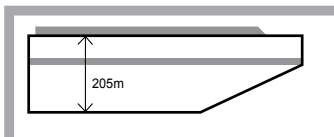

■ Ultra Slim Design

The thickness is only 205mm, saving on installation space.



■ Flexible Installation

Can be vertically installed against the wall or horizontally installed under the ceiling.



Ceiling & floor


Type L
ControllerXK-05
Wired Controller
(Optional)Central Controller
(Optional)WIFI
Controller
(Optional)

Specifications

	AMCF-H09/4R3A	AMCF-H12/4R3A	AMCF-H18/4R3A
Cooling Capacity (BTU/h)	9560(5120-12115)	12285(5800-12625)	18080(8530-19107)
Cooling Capacity (Kw)	2.80(1.50-3.55)	3.60(1.70-3.70)	5.3(2.50-5.6)
Heating Capacity (BTU/h)	10240(5460-13000)	13306(6930-15080)	19790(10340-24000)
Heating Capacity (Kw)	3.00(1.60-3.81)	3.9(2.03-4.42)	5.8(3.03-7.03)
Power Supply V~,Hz,Ph	220~240,50,1	220~240,50,1	220~240,50,1
Cooling Power Input (W)	80(20-125)	80(20-125)	80(20-125)
Heating Power Input (W)	80(20-125)	80(20-125)	80(20-125)
Fan Motor - Output Power (W)	40	40	40
Fan Motor - Speed (Hi/Mi/Lo) (r/min)	1250/1050/950	1250/1050/950	1300/1100/1000
Air Flow Volume (CFM)	441/353/294	441/353/294	500/412/353
Air Flow Volume (m3/h)	750/600/500	750/600/500	850/700/600
Sound Pressure Level (dB(A))	39/36/30	39/36/30	45/42/40
Sound Power Level (dB(A))	55	55	59
Dimension - Net Dim (W*D*H) (mm)	929×660×205	929×660×205	929×660×205
Weight - Net(Body) (kg)	26	26	26
Refrigerant Type	R32	R32	R32
Piping Diameter - Liquid Side (mm(inch))	6.35(1/4)	6.35(1/4)	6.35(1/4)
Piping Diameter - Gas Side (mm(inch))	12.7(1/2)	12.7(1/2)	12.7(1/2)
Drainage (mm)	20	20	20

Dimensions

9K, 12K, 18K AUX-M-F09/I, AUX-M-F12/I, AUX-M-F18/I

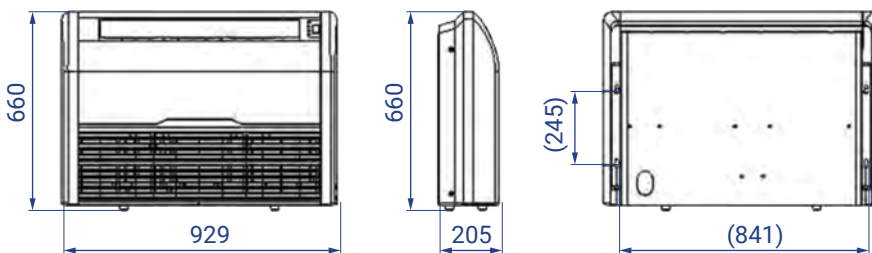

Project Tender

