

4-Way Cassette (48000 BTU)

ALCA-H48/4DR1H

AUX
AIR CONDITIONER



Light Commercial

SPECIFICATIONS

Model	Indoor	ALCA-H48/4DR1H	
	Outdoor	AL-H48/4DR1H(U)	
Capacity	Cooling/Heating	Btu/h	48000(14000-54600)/55000(15700-59700)
		kW	14.00(4.10-16.00)/16.00(4.60-17.50)
Electric Data	Power Supply	V~,Hz,Ph	380~415,50,3
	Cooling /HeatingPower Inp	kW	4.95(1.21-6.48)/4.57(0.92-5.66)
	SEER/SCOP	W/W	5.6/4.0
Performance	ERP Energy Efficiency Class		A+/A+
	Air Flow Volume	m ³ /h	2050/1750/1500
	Sound Pressure Noise Level	dB(A)	53/48/42
Dimension (WxDxH)	Net(Body)	mm	835×835×290
	Packing(Body)	mm	910×910×350
	Net(Panel)	mm	950×950×55
	Packing(Panel)	mm	1000×1000×100
Weight	Net/Gross(Body)	kg	26.5/30.5
	Net/Gross(Panel)	kg	5/7
Piping size	Drainage	mm(inch)	DN20(R3/4)
Applicable Area		m ²	64-107
Stuffing Quantity	20/40/40H	set	22/50/55

FEATURES

■ optional ■ standard



Remote Control



Built-in Drain Pump



Auto Restart Function



Fresh Air Intake



Low Ambient Cooling



Fire-proof Electric Box



Hydrophilic Aluminum Fin



Washable Filter



Fast Cooling/Heating



Digital Tube Display



Wired Control



Central Control




Golden Fin



WIFI Control

Built-In Water Drainage Pump

The built-in pump can lift condensing water up to 1200mm high from the drainage pan.

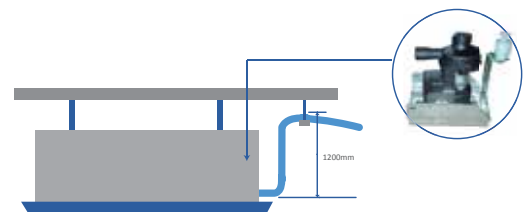

Fresh Air Intake


Fresh air makes indoor air healthy and comfortable.



Fresh air intake

Optimized Electric Box

Better fire-proof and easy to maintenance.

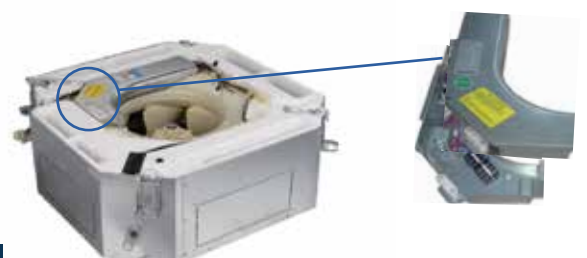

opticlina

4-Way Cassette (60000 BTU)

ALCA-H60/4DR1H

AUX
AIR CONDITIONER



Light Commercial

SPECIFICATIONS

Model	Indoor	ALCA-H60/4DR1H	
	Outdoor	AL-H60/4DR1H(U)	
Capacity	Cooling/Heating	Btu/h	55000(16400-59000)/60000(16700-63100)
		kW	16.00(4.80-17.30)/17.00(4.90-18.50)
Electric Data	Power Supply	V~,Hz,Ph	380~415,50,3
	Cooling /HeatingPower Inp	kW	5.71(1.38-6.85)/4.96(0.98-6.00)
	SEER/SCOP	W/W	5.6/4.0
Performance	ERP Energy Efficiency Class		A+/A+
	Air Flow Volume	m ³ /h	2050/1750/1500
	Sound Pressure Noise Level	dB(A)	53/48/42
	Sound Power Noise Level	dB(A)	63
Dimension (WxDxH)	Net(Body)	mm	835×835×290
	Packing(Body)	mm	910×910×350
	Net(Panel)	mm	950×950×55
	Packing(Panel)	mm	1000×1000×100
Weight	Net/Gross(Body)	kg	26.5/30.5
	Net/Gross(Panel)	kg	5/7
Piping size	Drainage	mm(inch)	DN20(R3/4)
Applicable Area		m ²	64-107
Stuffing Quantity	20/40/40H	set	22/50/55

FEATURES

■ optional ■ standard



Remote Control



Built-in Drain Pump



Auto Restart Function



Fresh Air Intake



Low Ambient Cooling



Fire-proof Electric Box



Hydrophilic Aluminum Fin



Washable Filter



Fast Cooling/Heating



Digital Tube Display



Wired Control



Central Control




Golden Fin



WIFI Control

Built-In Water Drainage Pump

The built-in pump can lift condensing water up to 1200mm high from the drainage pan.

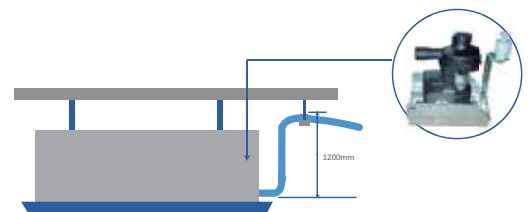

Fresh Air Intake


Fresh air makes indoor air healthy and comfortable.



Fresh air intake

Optimized Electric Box

Better fire-proof and easy to maintenance.

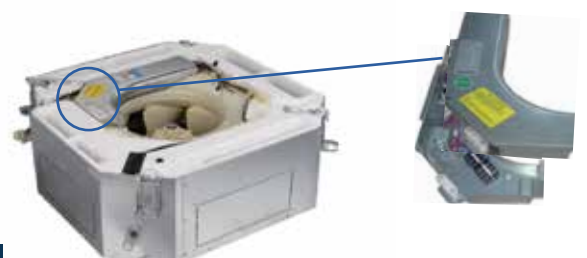

opticlina