

Free Match-Indoor Units (9000 BTU)

Four Way Cassette / AMCA-H09/4R3AA

AUX
AIR CONDITIONER



Light Commercial

SPECIFICATIONS

Model	Indoor unit	AMCA-H09/4R3AA	
Capacity	Cooling/Heating	Btu/h	9560(5120-12115)/10240(5460-13000)
		kW	2.80(1.50-3.55)/3.00(1.60-3.81)
Electric Data	Power Supply	V~,Hz,Ph	220~240,50,1
	Cooling/Heating Power Input	W	70(17.5-109)/70(17.5-109)
Performance	Air Flow Volume	m ³ /h	700/600/530
	Noise Level	dB(A)	45/41/35
Dimension (WxDxH)	Net(Body)	mm	570×570×260
	Packing(Body)	mm	655×655×290
	Net(Panel)	mm	650×650×55
	Packing(Panel)	mm	710×710×80
Weight	Net/Gross(Body)	kg	18/21
	Net/Gross(Panel)	kg	2.2/3.7
Piping size	Liquid Side	mm(inch)	6.35(1/4)
	Gas Side	mm(inch)	12.7(1/2)
	Drainage	mm(inch)	20

FEATURES

■ optional ■ standard



Remote Control



Built-in Drain Pump



Auto Restart Function



Fresh Air Intake



Low Ambient Cooling



Fire-proof Electric Box



Hydrophilic Aluminum Fin



Washable Filter



Fast Cooling/Heating



Digital Tube Display



Wired Control



Central Control




Golden Fin



WIFI Control


Space-Saving Installation

Up to 5 indoor units can be connected to a single outdoor unit, which reduces the number of outdoor units required so as to save installation space. Besides, each indoor unit can be controlled individually and they even needn't to be installed at the same time.

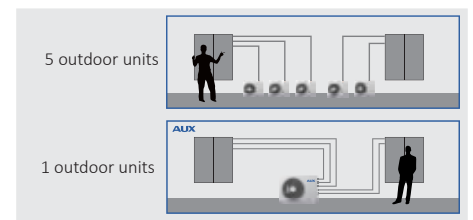


Energy Saving

Cutting-edge DC inverter of sine wave control and active PFC technology realize low noise and economical operation.

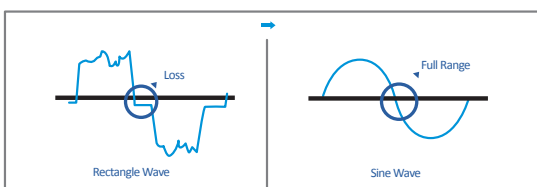

Low Ambient Cooling

The unit has the feature that keeping running under low ambient temperature, even in -10°C.

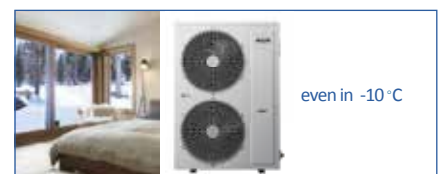

opticlina

Free Match-Indoor Units (12000 BTU)

Four Way Cassette / AMCA-H12/4R3AA

AUX
AIR CONDITIONER



Light Commercial

SPECIFICATIONS

Model	Indoor unit	AMCA-H12/4R3AA	
Capacity	Cooling/Heating	Btu/h	12285(5800-12625)/13306(6930-15080)
		kW	3.60(1.70-3.70)/3.90(2.03-4.42)
Electric Data	Power Supply	V~,Hz,Ph	220~240,50,1
	Cooling/Heating Power Input	W	70(17.5-109)/70(17.5-109)
Performance	Air Flow Volume	m ³ /h	700/600/530
	Noise Level	dB(A)	45/41/35
Dimension (WxDxH)	Net(Body)	mm	570×570×260
	Packing(Body)	mm	655×655×290
	Net(Panel)	mm	650×650×55
	Packing(Panel)	mm	710×710×80
Weight	Net/Gross(Body)	kg	18/21
	Net/Gross(Panel)	kg	2.2/3.7
Piping size	Liquid Side	mm(inch)	6.35(1/4)
	Gas Side	mm(inch)	12.7(1/2)
	Drainage	mm(inch)	20

FEATURES

■ optional ■ standard



Remote Control



Built-in Drain Pump



Auto Restart Function



Fresh Air Intake



Low Ambient Cooling



Fire-proof Electric Box



Hydrophilic Aluminum Fin



Washable Filter



Fast Cooling/Heating



Digital Tube Display



Wired Control



Central Control




Golden Fin



WIFI Control


Space-Saving Installation

Up to 5 indoor units can be connected to a single outdoor unit, which reduces the number of outdoor units required so as to save installation space. Besides, each indoor unit can be controlled individually and they even needn't to be installed at the same time.

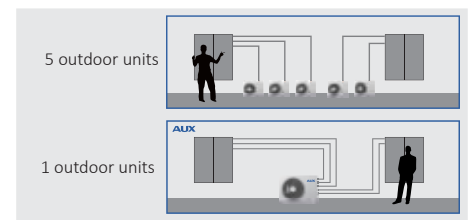


Energy Saving

Cutting-edge DC inverter of sine wave control and active PFC technology realize low noise and economical operation.

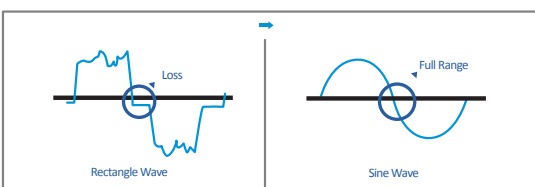

Low Ambient Cooling

The unit has the feature that keeping running under low ambient temperature, even in -10°C.

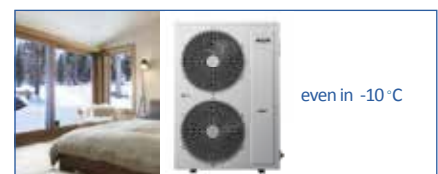

opticlina

Free Match-Indoor Units (18000 BTU)

Four Way Cassette / AMCA-H18/4R3AA

AUX
AIR CONDITIONER



Light Commercial

SPECIFICATIONS

Model	Indoor unit	AMCA-H18/4R3AA	
Capacity	Cooling/Heating	Btu/h	18080(8530-19107)/19790(10340-24000)
		kW	5.0(2.50-5.60)/5.60(3.03-7.03)
Electric Data	Power Supply	V~,Hz,Ph	220~240,50,1
	Cooling/Heating Power Input	W	70(17.5-109)/70(17.5-109)
Performance	Air Flow Volume	m ³ /h	700/600/530
	Noise Level	dB(A)	45/41/35
Dimension (WxDxH)	Net(Body)	mm	570×570×260
	Packing(Body)	mm	655×655×290
	Net(Panel)	mm	650×650×55
	Packing(Panel)	mm	710×710×80
Weight	Net/Gross(Body)	kg	18/21
	Net/Gross(Panel)	kg	2.2/3.7
Piping size	Liquid Side	mm(inch)	6.35(1/4)
	Gas Side	mm(inch)	12.7(1/2)
	Drainage	mm(inch)	20

FEATURES

■ optional ■ standard



Remote Control



Built-in Drain Pump



Auto Restart Function



Fresh Air Intake



Low Ambient Cooling



Fire-proof Electric Box



Hydrophilic Aluminum Fin



Washable Filter



Fast Cooling/Heating



Digital Tube Display



Wired Control



Central Control




Golden Fin



WIFI Control


Space-Saving Installation

Up to 5 indoor units can be connected to a single outdoor unit, which reduces the number of outdoor units required so as to save installation space. Besides, each indoor unit can be controlled individually and they even needn't to be installed at the same time.

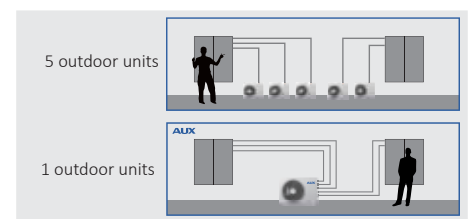


Energy Saving

Cutting-edge DC inverter of sine wave control and active PFC technology realize low noise and economical operation.

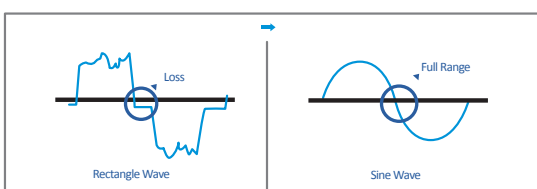

Low Ambient Cooling

The unit has the feature that keeping running under low ambient temperature, even in -10°C.

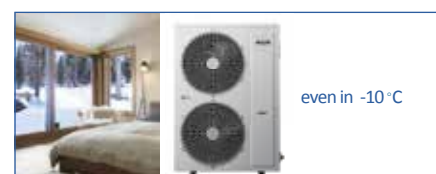

opticlina