

Free Match-Indoor Units (7000 BTU)

Wall Mounted / AMWM-H07/4R3(L*)

AUX

AIR CONDITIONER



Light Commercial

SPECIFICATIONS




Model	Indoor unit	AMWM-H07/4R3(L*)	
Capacity	Cooling/Heating	Btu/h	7165(3855-9220)/7510(3340-8530)
		kW	2.05(1.13-2.70)/2.15(0.98-2.50)
Electric Data	Power Supply	V~,Hz,Ph	220~240,50,1
	Cooling/Heating Power Input	W	40(12-68)/40(12-68)
Performance Dimension (WxDxH)	Air Flow Volume	m ³ /h	650/450/395
	Sound Pressure Noise Level	dB(A)	40/38/34
	Net	mm	800×300×198
Weight	Packing	mm	870×370×282
	Net/Gross	kg	9/10.5
Piping size	Liquid Side	mm(inch)	6.35(1/4)
	Gas Side	mm(inch)	9.52(3/8)
	Drainage	mm(inch)	16.53(3/5)

COMBINATION TABLE

Multi DC Outdoor Unit	Available Indoor Unit	Suggested Combination			
1 drive 2 AM2-H18/4D1	Wall mounted: 7k/9k/12k/18k 4-way Cassette: 9k/12k/18k Ceiling Floor: 9k/12k/18k Slim Duct: 7k/9k/12k/18k	One Unit	Two Units		
		7	7+7, 9+9, 12+12		
1 drive 3 AM3-H24/4D1	Wall mounted: 7k/9k/12k/18k 4-way Cassette: 9k/12k/18k Ceiling Floor: 9k/12k/18k Slim Duct: 7k/9k/12k/18k	One Unit	Two Units	Three Units	
		7	7+7, 9+9, 12+12	7+7+7, 7+7+9, 7+9+9, 9+9+9, 12+12+12	
1 drive 3 AM3-H27/4C11	Wall mounted: 7k/9k/12k/18k 4-way Cassette: 9k/12k/18k Ceiling Floor: 9k/12k/18k Slim Duct: 7k/9k/12k/18k	One Unit	Two Units	Three Units	
		7	7+7, 9+9, 12+12	7+7+7, 7+7+9, 7+9+9, 9+9+9, 12+12+12	
1 drive 4 AM4-H36/4DR	Wall mounted: 7k/9k/12k/18k/24k 4-way Cassette: 9k/12k/18k/24k Ceiling Floor: 9k/12k/18k/24k Slim Duct: 7k/9k/12k/18k/24k	One Unit	Two Units	Three Units	Four Units
		7	7+7, 9+9, 12+12, 18+18, 24+24	7+7+7, 7+7+9, 7+9+9, 9+9+9, 12+12+12, 12+12+18, 12+18+18, 18+18+18, 24+24+24	
1 drive 5 AM5-H42/4DR	Wall mounted: 7k/9k/12k/18k/24k 4-way Cassette: 9k/12k/18k/24k Ceiling Floor: 9k/12k/18k/24k Slim Duct: 7k/9k/12k/18k/24k	Three Units	Four Units	Five Units	
		7+7+7, 7+7+9, 7+9+9, 9+9+9, 12+12+12, 12+12+18, 12+18+18, 18+18+18, 24+24+24	7+7+7+7, 7+7+7+9, 7+7+9+9, 7+9+9+9, 9+9+9+9, 12+12+12+12, 12+12+12+18, 12+12+18+18, 12+18+18+18, 18+18+18+18, 24+24+24+24		


Space-Saving Installation

Up to 5 indoor units can be connected to a single outdoor unit, which reduces the number of outdoor units required so as to save installation space. Besides, each indoor unit can be controlled individually and they even needn't to be installed at the same time.

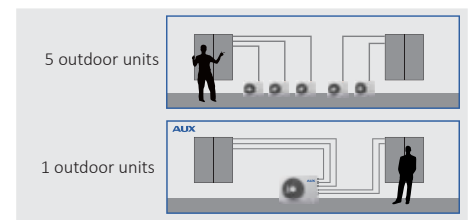


Energy Saving

Cutting-edge DC inverter of sine wave control and active PFC technology realize low noise and economical operation.

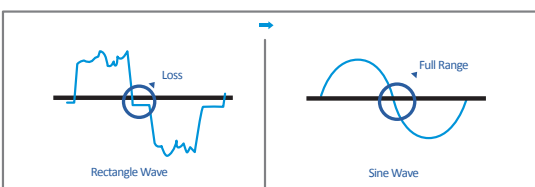

Low Ambient Cooling

The unit has the feature that keeping running under low ambient temperature, even in -10°C.

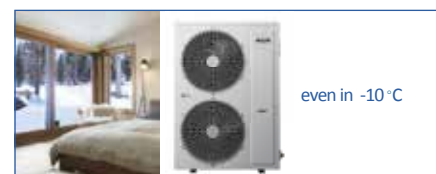

opticlina

Free Match-Indoor Units (9000 BTU)

Wall Mounted / AMWM-H09/4R3(L*)

AUX

AIR CONDITIONER



Light Commercial

SPECIFICATIONS




Model	Indoor unit	AMWM-H09/4R3(L*)	
Capacity	Cooling/Heating	Btu/h	8701(3412-11260)/9042(3753-11260)
		kW	2.55(1.00-3.30)/2.65(1.10-3.30)
Electric Data	Power Supply	V~,Hz,Ph	220~240,50,1
	Cooling/Heating Power Input	W	40(12-68)/40(12-68)
Performance Dimension (WxDxH)	Air Flow Volume	m ³ /h	650/450/395
	Sound Pressure Noise Level	dB(A)	41/38/34
	Net	mm	800x300x198
Weight	Packing	mm	870x370x282
	Net/Gross	kg	9/10.5
Piping size	Liquid Side	mm(inch)	6.35(1/4)
	Gas Side	mm(inch)	9.52(3/8)
	Drainage	mm(inch)	16.5(3/5)

COMBINATION TABLE

Multi DC Outdoor Unit	Available Indoor Unit	Suggested Combination			
1 drive 2 AM2-H18/4DR	Wall mounted: 7k/9k/12k/18k 4-way Cassette: 9k/12k/18k Ceiling Floor: 9k/12k/18k Slim Duct: 7k/9k/12k/18k	One Unit	Two Units		
		7	9, 12, 18		
1 drive 3 AM3-H24/4DR	Wall mounted: 7k/9k/12k/18k 4-way Cassette: 9k/12k/18k Ceiling Floor: 9k/12k/18k Slim Duct: 7k/9k/12k/18k	One Unit	Two Units	Three Units	
		7	9, 12, 18	9, 12, 18	
1 drive 3 AM3-H27/4DR	Wall mounted: 7k/9k/12k/18k 4-way Cassette: 9k/12k/18k Ceiling Floor: 9k/12k/18k Slim Duct: 7k/9k/12k/18k	One Unit	Two Units	Three Units	
		7	9, 12, 18	9, 12, 18	
1 drive 4 AM4-H36/4DR	Wall mounted: 7k/9k/12k/18k/24k 4-way Cassette: 9k/12k/18k/24k Ceiling Floor: 9k/12k/18k/24k Slim Duct: 7k/9k/12k/18k/24k	One Unit	Two Units	Three Units	Four Units
		7	9, 12, 18, 24	9, 12, 18, 24	9, 12, 18, 24
1 drive 5 AM5-H42/4DR	Wall mounted: 7k/9k/12k/18k/24k 4-way Cassette: 9k/12k/18k/24k Ceiling Floor: 9k/12k/18k/24k Slim Duct: 7k/9k/12k/18k/24k	Three Units	Four Units	Five Units	
		7, 9, 12, 18, 24	7, 9, 12, 18, 24	7, 9, 12, 18, 24	


Space-Saving Installation

Up to 5 indoor units can be connected to a single outdoor unit, which reduces the number of outdoor units required so as to save installation space. Besides, each indoor unit can be controlled individually and they even needn't to be installed at the same time.

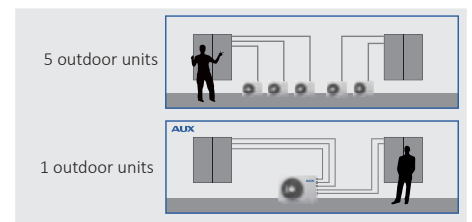


Energy Saving

Cutting-edge DC inverter of sine wave control and active PFC technology realize low noise and economical operation.

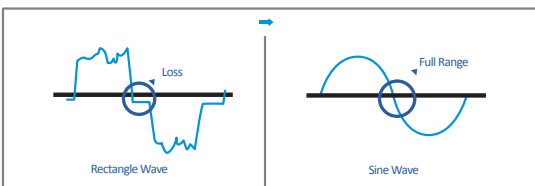

Low Ambient Cooling

The unit has the feature that keeping running under low ambient temperature, even in -10°C.

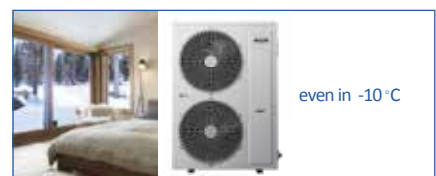

opticlina

Free Match-Indoor Units (12000 BTU)

Wall Mounted / AMWM-H12/4R3(L*)

AUX

AIR CONDITIONER



Light Commercial

SPECIFICATIONS




Model	Indoor unit	AMWM-H12/4R3(L*)	
Capacity	Cooling/Heating	Btu/h	12283(4094-12966)/12624(3412-12966)
		kW	3.50(1.20-3.80)/3.50(1.00-3.80)
Electric Data	Power Supply	V~,Hz,Ph	220~240,50,1
	Cooling/Heating Power Input	W	40(12-68)/40(12-68)
Performance Dimension (WxDxH)	Air Flow Volume	m ³ /h	650/450/395
	Sound Pressure Noise Level	dB(A)	42/40/36
	Net	mm	800×300×198
Weight	Packing	mm	870×370×282
	Net/Gross	kg	9/10.5
Piping size	Liquid Side	mm(inch)	6.35(1/4)
	Gas Side	mm(inch)	9.52(3/8)
	Drainage	mm(inch)	16.5(3/5)

COMBINATION TABLE

Multi DC Outdoor Unit	Available Indoor Unit	Suggested Combination			
1 drive 2 AM2-H18/4DR	Wall mounted: 7k/9k/12k/18k 4-way Cassette: 9k/12k/18k Ceiling Floor: 9k/12k/18k Slim Duct: 7k/9k/12k/18k	One Unit	Two Units		
		7	9, 12, 18		
1 drive 3 AM3-H24/4DR	Wall mounted: 7k/9k/12k/18k 4-way Cassette: 9k/12k/18k Ceiling Floor: 9k/12k/18k Slim Duct: 7k/9k/12k/18k	One Unit	Two Units	Three Units	
		7	9, 12, 18	9, 12, 18	
1 drive 3 AM3-H27/4DR	Wall mounted: 7k/9k/12k/18k 4-way Cassette: 9k/12k/18k Ceiling Floor: 9k/12k/18k Slim Duct: 7k/9k/12k/18k	One Unit	Two Units	Three Units	
		7	9, 12, 18	9, 12, 18	
1 drive 4 AM4-H36/4DR	Wall mounted: 7k/9k/12k/18k/24k 4-way Cassette: 9k/12k/18k/24k Ceiling Floor: 9k/12k/18k/24k Slim Duct: 7k/9k/12k/18k/24k	One Unit	Two Units	Three Units	Four Units
		7	9, 12, 18, 24	9, 12, 18, 24	9, 12, 18, 24
1 drive 5 AM5-H42/4DR	Wall mounted: 7k/9k/12k/18k/24k 4-way Cassette: 9k/12k/18k/24k Ceiling Floor: 9k/12k/18k/24k Slim Duct: 7k/9k/12k/18k/24k	Three Units	Four Units	Five Units	
		7, 9, 12, 18, 24	7, 9, 12, 18, 24	7, 9, 12, 18, 24	


Space-Saving Installation

Up to 5 indoor units can be connected to a single outdoor unit, which reduces the number of outdoor units required so as to save installation space. Besides, each indoor unit can be controlled individually and they even needn't to be installed at the same time.

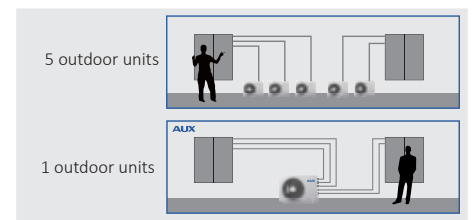


Energy Saving

Cutting-edge DC inverter of sine wave control and active PFC technology realize low noise and economical operation.

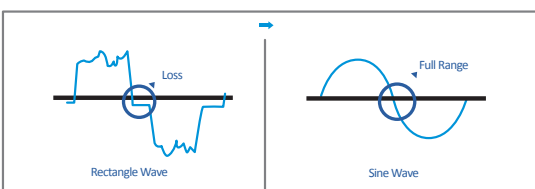

Low Ambient Cooling

The unit has the feature that keeping running under low ambient temperature, even in -10°C.

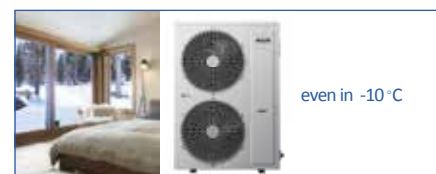

opticlina

Free Match-Indoor Units (18000 BTU)

Wall Mounted / AMWM-H18/4R3(L*)

AUX

AIR CONDITIONER



Light Commercial

SPECIFICATIONS




Model	Indoor unit	AMWM-H18/4R3(L*)	
Capacity	Cooling/Heating	Btu/h	18083(6483-18766)/18425(4777-19107)
		kW	5.30(1.90-5.50)/5.40(1.40-5.60)
Electric Data	Power Supply	V~,Hz,Ph	220~240,50,1
	Cooling/Heating Power Input	W	63(16-88)/63(16-88)
	Air Flow Volume	m ³ /h	1000/860/688
Performance Dimension (WxDxH)	Sound Pressure Noise Level	dB(A)	48/42/35
	Net	mm	970x315x235
	Packing	mm	1047x385x317
Weight	Net/Gross	kg	12.5/14.5
	Liquid Side	mm(inch)	6.35(1/4)
Piping size	Gas Side	mm(inch)	12.7(1/2)
	Drainage	mm(inch)	16.5(3/5)

COMBINATION TABLE

Multi DC Outdoor Unit	Available Indoor Unit	Suggested Combination			
1 drive 2 AM2-H18/4DR	Wall mounted: 7k/9k/12k/18k 4-way Cassette: 9k/12k/18k Ceiling Floor: 9k/12k/18k Slim Duct: 7k/9k/12k/18k	One Unit	Two Units		
		7	9, 12, 18		
1 drive 3 AM3-H24/4DR	Wall mounted: 7k/9k/12k/18k 4-way Cassette: 9k/12k/18k Ceiling Floor: 9k/12k/18k Slim Duct: 7k/9k/12k/18k	One Unit	Two Units	Three Units	
		7	9, 12, 18	9, 12, 18	
1 drive 3 AM3-H27/4DR	Wall mounted: 7k/9k/12k/18k 4-way Cassette: 9k/12k/18k Ceiling Floor: 9k/12k/18k Slim Duct: 7k/9k/12k/18k	One Unit	Two Units	Three Units	
		7	9, 12, 18	9, 12, 18	
1 drive 4 AM4-H36/4DR	Wall mounted: 7k/9k/12k/18k/24k 4-way Cassette: 9k/12k/18k/24k Ceiling Floor: 9k/12k/18k/24k Slim Duct: 7k/9k/12k/18k/24k	One Unit	Two Units	Three Units	Four Units
		7	9, 12, 18, 24	9, 12, 18, 24	9, 12, 18, 24
1 drive 5 AM5-H42/4DR	Wall mounted: 7k/9k/12k/18k/24k 4-way Cassette: 9k/12k/18k/24k Ceiling Floor: 9k/12k/18k/24k Slim Duct: 7k/9k/12k/18k/24k	Three Units	Four Units	Five Units	
		7, 9, 12, 18, 24	7, 9, 12, 18, 24	7, 9, 12, 18, 24	


Space-Saving Installation

Up to 5 indoor units can be connected to a single outdoor unit, which reduces the number of outdoor units required so as to save installation space. Besides, each indoor unit can be controlled individually and they even needn't to be installed at the same time.

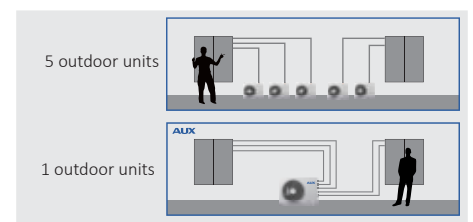


Energy Saving

Cutting-edge DC inverter of sine wave control and active PFC technology realize low noise and economical operation.

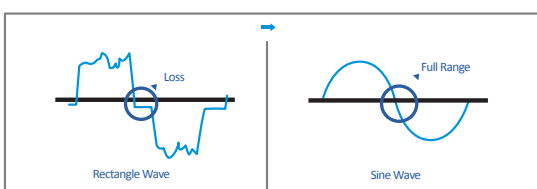

Low Ambient Cooling

The unit has the feature that keeping running under low ambient temperature, even in -10°C.

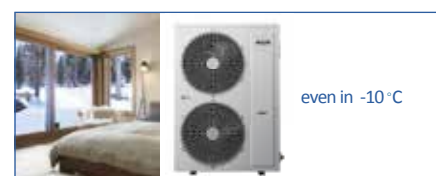

opticlina